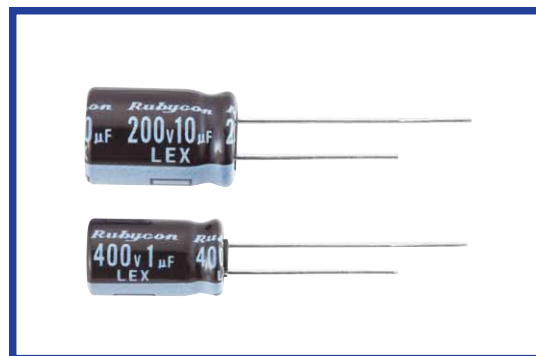


LEX SERIES
Load Life: 125°C 4000~5000hours.
◆FEATURES

- Ultra Long Life.
- For LED Lighting.
- RoHS compliance.


◆SPECIFICATIONS

Items	Characteristics																
Category Temperature Range	-40~+125°C																
Rated Voltage Range	160~400V.DC																
Capacitance Tolerance	±20%(20°C,120Hz)																
Leakage Current(MAX)	<table border="1"> <thead> <tr> <th>CV≤1000</th> <th>CV>1000</th> </tr> </thead> <tbody> <tr> <td>I=0.1CV+40µA (1minute) I=0.03CV+15µA (5minutes)</td> <td>I=0.04CV+100µA (1minute) I=0.02CV+25µA (5minutes)</td> </tr> </tbody> </table>	CV≤1000	CV>1000	I=0.1CV+40µA (1minute) I=0.03CV+15µA (5minutes)	I=0.04CV+100µA (1minute) I=0.02CV+25µA (5minutes)	I=Leakage Current(µA) C=Capacitance(µF) V=Rated Voltage(V)											
CV≤1000	CV>1000																
I=0.1CV+40µA (1minute) I=0.03CV+15µA (5minutes)	I=0.04CV+100µA (1minute) I=0.02CV+25µA (5minutes)																
Dissipation Factor(MAX) (tanδ)	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>160</th> <th>200</th> <th>250</th> <th>400</th> </tr> </thead> <tbody> <tr> <td>tanδ</td> <td>0.24</td> <td>0.24</td> <td>0.24</td> <td>0.24</td> </tr> </tbody> </table> (20°C,120Hz)		Rated Voltage (V)	160	200	250	400	tanδ	0.24	0.24	0.24	0.24					
Rated Voltage (V)	160	200	250	400													
tanδ	0.24	0.24	0.24	0.24													
Endurance	After life test with rated ripple current at conditions stated in the table below at 125°C, the capacitors shall meet the following requirements. <table border="1"> <thead> <tr> <th>Capacitance Change</th> <th>Within ±30% of the initial value.</th> <th>Case Size</th> <th>Life Time (hrs)</th> </tr> </thead> <tbody> <tr> <td>Dissipation Factor</td> <td>Not more than 300% of the specified value.</td> <td>6.3×11.8×9,10×9</td> <td>4000</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> <td>8×11.5,10×12.5,10×16</td> <td>5000</td> </tr> </tbody> </table>		Capacitance Change	Within ±30% of the initial value.	Case Size	Life Time (hrs)	Dissipation Factor	Not more than 300% of the specified value.	6.3×11.8×9,10×9	4000	Leakage Current	Not more than the specified value.	8×11.5,10×12.5,10×16	5000			
Capacitance Change	Within ±30% of the initial value.	Case Size	Life Time (hrs)														
Dissipation Factor	Not more than 300% of the specified value.	6.3×11.8×9,10×9	4000														
Leakage Current	Not more than the specified value.	8×11.5,10×12.5,10×16	5000														
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>160</th> <th>200</th> <th>250</th> <th>400</th> </tr> </thead> <tbody> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>3</td> <td>3</td> <td>6</td> <td>6</td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td>8</td> <td>8</td> <td>10</td> <td>12</td> </tr> </tbody> </table> (120Hz)		Rated Voltage (V)	160	200	250	400	Z(-25°C)/Z(20°C)	3	3	6	6	Z(-40°C)/Z(20°C)	8	8	10	12
Rated Voltage (V)	160	200	250	400													
Z(-25°C)/Z(20°C)	3	3	6	6													
Z(-40°C)/Z(20°C)	8	8	10	12													

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency (Hz)		120	1k	10k	100k≤
Coefficient	1~5.6µF	1.0	1.6	1.8	2.0
	6.8~18µF	1.0	1.5	1.7	1.9
	22~33µF	1.0	1.4	1.6	1.8

◆OPTION


	Code
PET Sleeve	EFC

◆PART NUMBER

□□□	LEX	□□□□□	M	□□□	□□	D×L
Rated Voltage	Series	Capacitance	Capacitance Tolerance	Option	Lead Forming	Case Size

◆ DIMENSIONS

(mm)

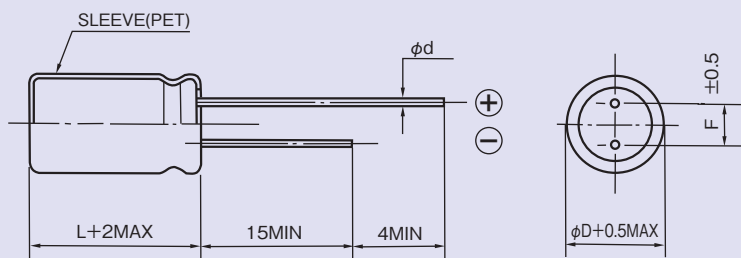

ϕD	6.3	8	10
ϕd	0.5	0.6	
F	2.5	3.5	5

◆ STANDARD SIZE

V.DC	Cap(μF)	Size $\phi D \times L$ (mm)	Ripple Current(mA r.m.s.125°C)	
			120Hz	100kHz
160 (2C)	5.6	6.3×11	52	104
	10	8×9	70	133
	15	8×11.5	92	174
		10×9	95	180
	22	10×12.5	121	217
	33	10×16	158	284
200 (2D)	2.2	6.3×11	36	72
	3.3	6.3×11	42	84
	4.7	6.3×11	49	98
	5.6	8×9	56	112
	6.8	8×9	62	117
	8.2	8×9	66	125
	10	8×11.5	80	152
	12	10×9	88	167
	18	10×12.5	113	214
	27	10×16	149	268

V.DC	Cap(μF)	Size $\phi D \times L$ (mm)	Ripple Current(mA r.m.s.125°C)	
			120Hz	100kHz
250 (2E)	1.8	6.3×11	33	66
	2.2	6.3×11	36	72
	3.3	6.3×11	42	84
	4.7	8×9	53	106
	5.6	8×11.5	56	112
	6.8	8×11.5	68	129
	8.2	10×9	76	144
	10	10×12.5	83	157
	12	10×12.5	97	184
	18	10×16	127	241
400 (2G)	1	6.3×11	24	48
	1.2	8×9	28	56
	1.5	8×9	30	60
	1.8	8×9	33	66
	2.2	8×9	36	72
		8×11.5	40	80
	2.7	8×11.5	43	86
	3.3	8×11.5	47	94
		10×9	48	96
	3.9	10×12.5	57	114
	4.7	10×12.5	61	122
	6.8	10×16	85	161